
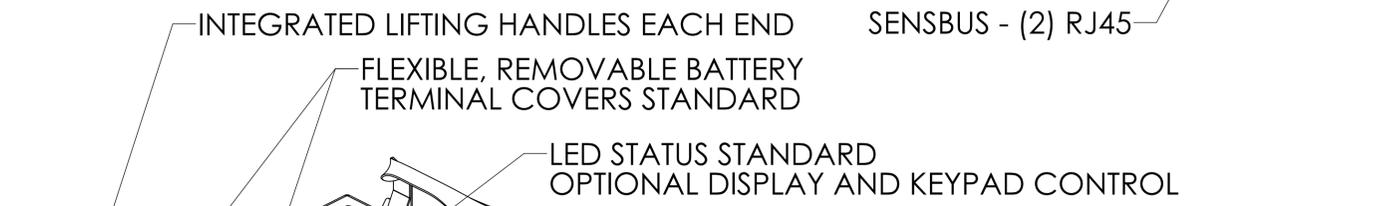


SUPER TORQUE 8Z ENGINE STARTING SYSTEM


- 12 OR 24 VOLT ENGINE STARTING SYSTEM
- INTEGRATED BATTERY, CHARGER, AND CONTROL SYSTEM IN AN 8D SIZED PACKAGE
- INTERNAL NICKEL ZINC BATTERIES
- INTERNAL SENS MG2 15A CHARGER
- USER CONNECTIONS ALL EXTERIOR, PROTECTED AND COVERED
- 110-240 VAC INPUT, 4A
- VIA IEC-320 C13 INLET CONNECTOR
- 8FT LOCKING AC CORD PROVIDED STANDARD
- OPTIONAL UL LISTED FIELD TERMINABLE LOCKING CONNECTOR
- IEC-320 C14 OUTLET TO DAISY-CHAIN UP TO TWO UNITS
- COMMUNICATIONS
- STANDARD - (2) ALARM RELAYS, USB, CANBUS
- OPTIONAL - MODBUS RS-485
- OPTIONAL - ETHERNET, MODBUS RS485, AND TCP/IP
- WEIGHT - 89LBS

REVISIONS				
DCN	REV	DESCRIPTION	DATE	APPROVED
108283	A	INITIAL RELEASE	9/13/2022	BJB

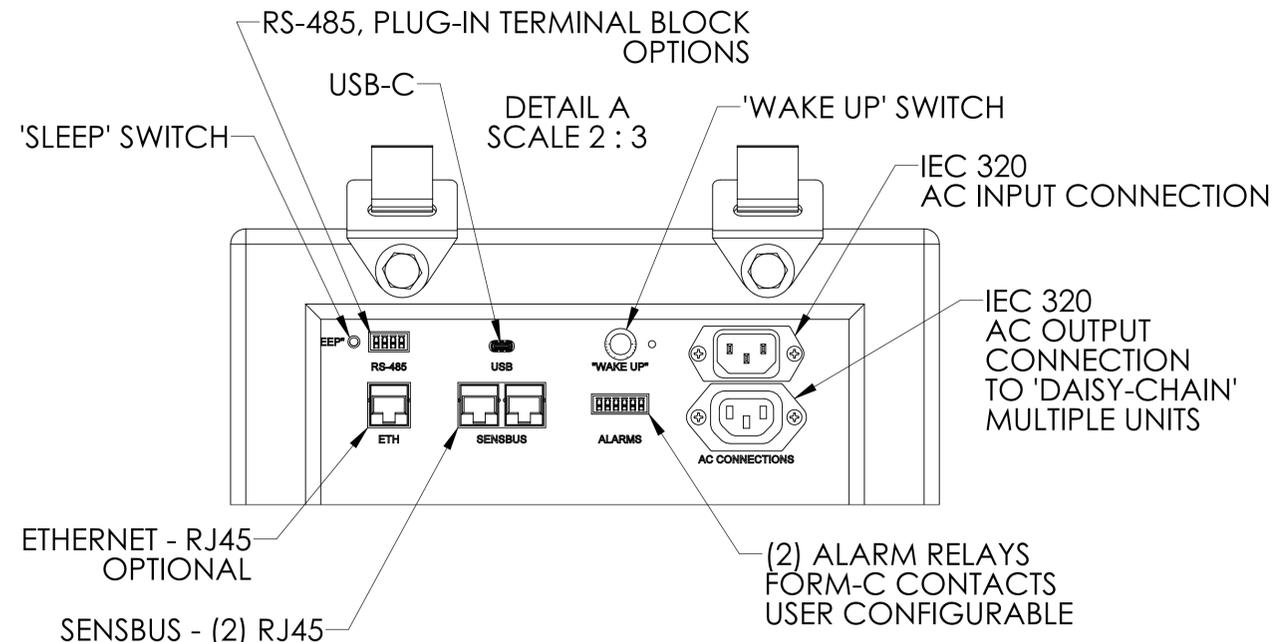


SHOWN AS STANDARD CONFIGURATION
NO FIELD WIRING COVER OR MOUNTING BRACKETS
RUBBER FEET ON BASE


STARTER CONNECTION TERMINALS
M8 THREADED INSERT FOR RING LUG CONNECTION
13MM SOCKET/WRENCH SIZE

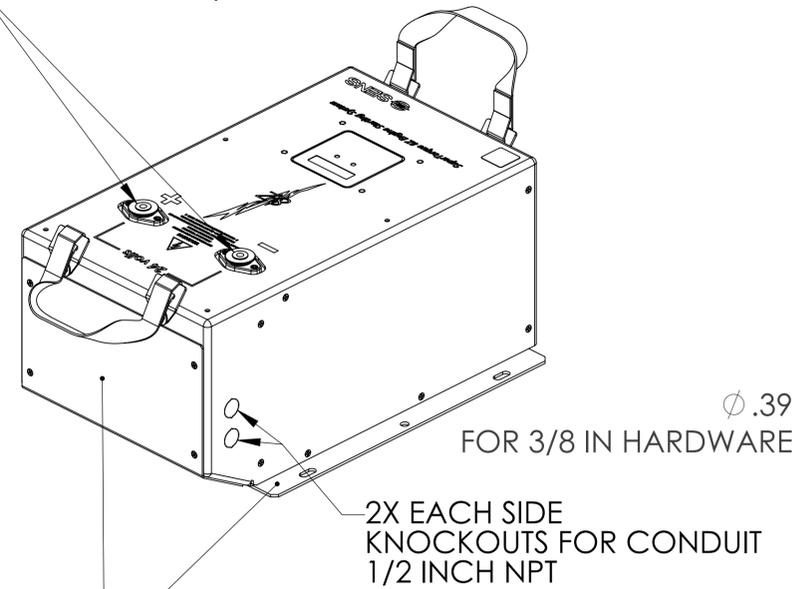


MOUNTING BRACKET DIMENSIONS

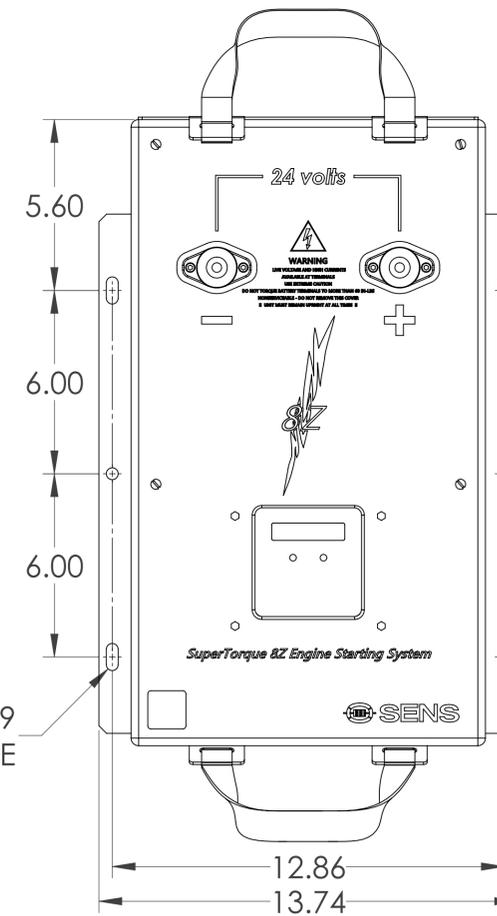

OVERALL DIMENSIONS

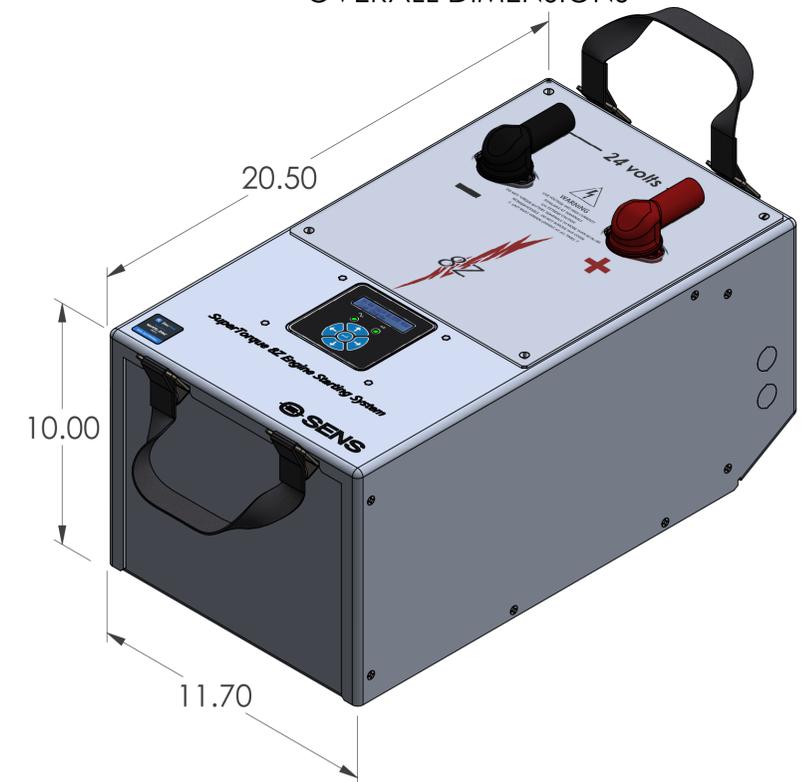

FRONT VIEW

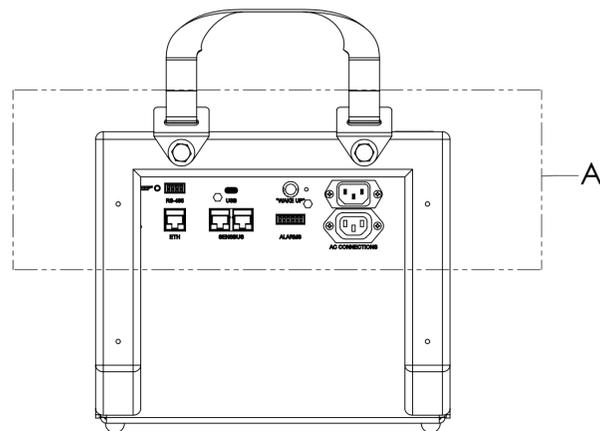

1840 INDUSTRIAL CIRCLE
LONGMONT, CO 80501
303-478-7500
WWW.SENS-USA.COM

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF STORED ENERGY SYSTEMS, LLC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF STORED ENERGY SYSTEMS, LLC IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES
DEFAULT TOLERANCES:
ANGLES ± 1°
TWO PLACE DECIMAL ± .02
THREE PLACE DECIMAL ± .005
DO NOT SCALE DRAWING

NAME	DATE	DESCRIPTION	REV
DRAWN ERS	12/29/2021	2DCAD,8Z,STANDARD	A
CHECKED			
THIRD ANGLE PROJECTION	SIZE D	DOCUMENT NUMBER 2DCAD,8Z,STD	SHEET 1 OF 1