

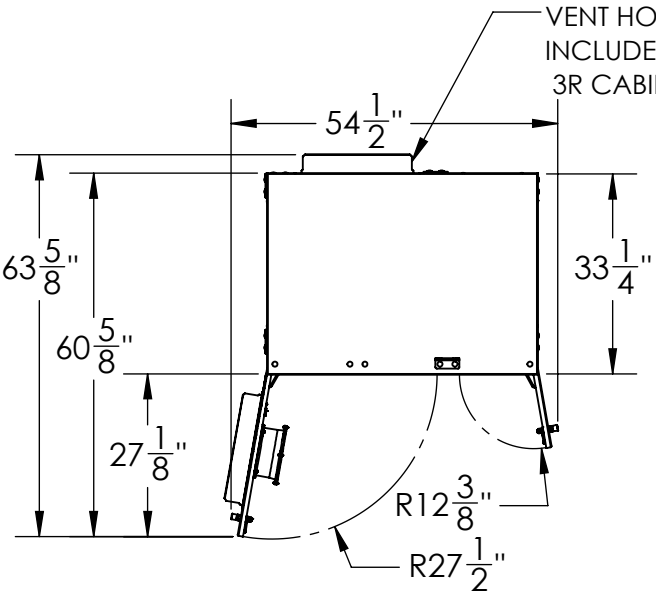


1. HEIGHT AND WEIGHT OF SYSTEM MAY VARY, SEE SPECIFIC SYSTEM DETAILS.
2. TCP/IP (TRANSMISSION CONTROL PROTOCOL/INTERNET PROTOCOL) USES AN RJ-45 PORT TO ALLOW REMOTE UPDATES.
3. DOORS HAVE LOCKING LATCHES
4. LIFTING ACCOMPLISHED BY FORKLIFT OR PALLET JACK, OR BY LIFTING RINGS IF INSTALLED
5. ANCHORING REQUIRES QTY 4 MIN. 1/2 INCH ANCHORS INTO CONCRETE OR STEEL
6. MATERIALS POWDER COATED GALVANNEAL FOR CORROSION RESISTANCE - COLOR ANSI 61 GREY.
7. PANELS CAN BE REMOVED TO ADD HOLES FOR CONDUIT FITTINGS, SECURITY BIT NEEDED/INCLUDED TO REMOVE PANELS.



REV	DCN	DESCRIPTION	DATE	AUTHOR
A	108773	INITIAL RELEASE	11/15/2024	L.MARCOON

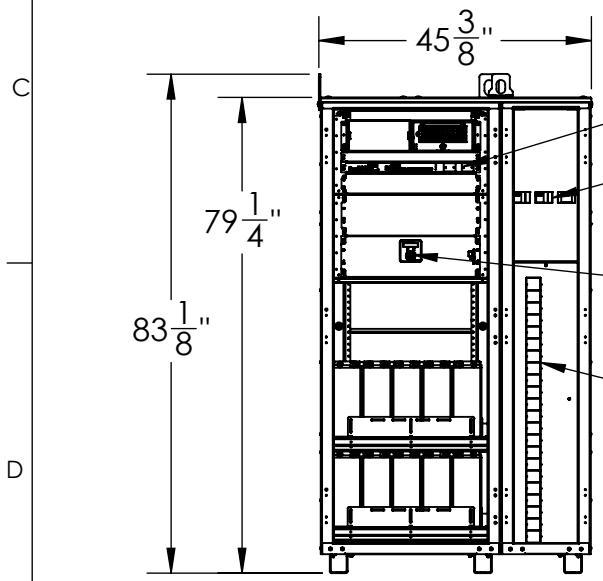

OPTION FOR THERMAL MANAGEMENT FAN ON DOOR

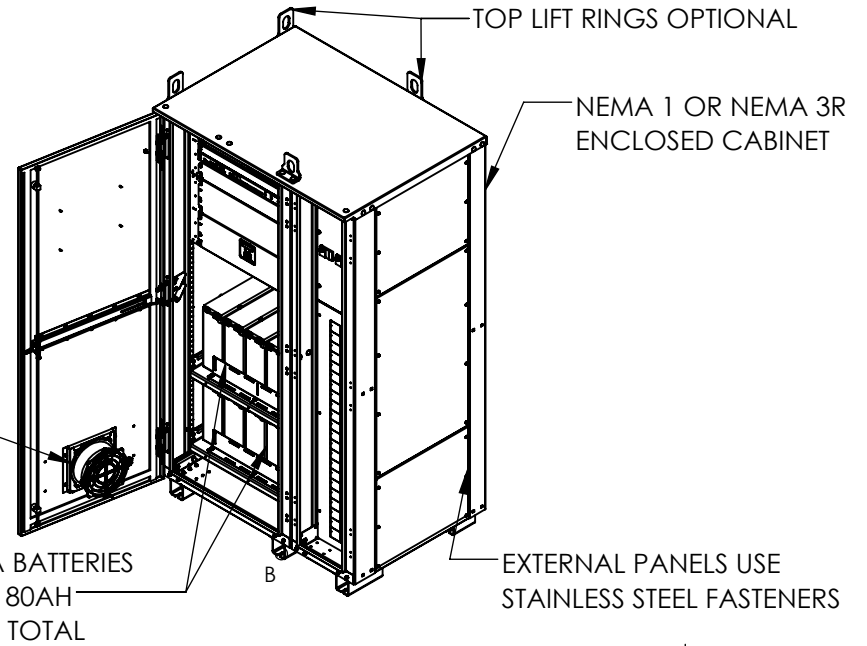

ANCHOR MOUNTING PATTERN

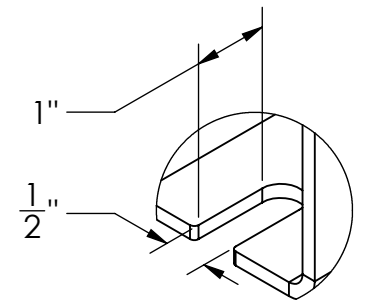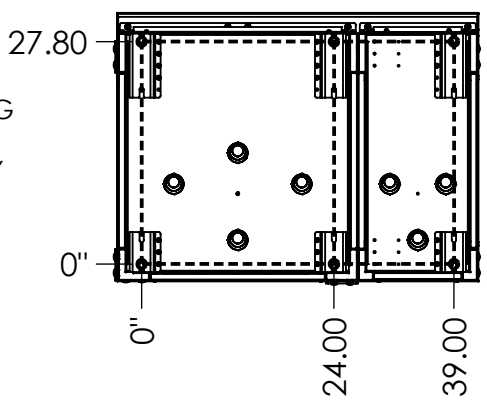

DETAIL B
FLOOR MOUNTING
FOR 1/2" BOLTS

SENS
STORED ENERGY SYSTEMS
1840 INDUSTRIAL CIRCLE LONGMONT, CO 80501
303-678-7500 WWW.SENS-USA.COM

PROPRIETARY AND CONFIDENTIAL: THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF STORED ENERGY SYSTEMS, LLC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF STORED ENERGY SYSTEMS, LLC, IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED, FOR ALL SHEETS: DIMENSIONS ARE IN INCHES. DO NOT SCALE DRAWING. MOST REVISED ITEMS INDICATED IN BLUE.

DEFAULT TOLERANCES:
±1/16" ASSEMBLY TOLERANCE

PART NUMBER: 2DCAD-PC2-FH-VRLA		REVISION: A
SHEET FORMAT SIZE: A THIRD ANGLE PROJECTION DIMENSIONS & TOLERANCES PER ASME Y14.5 - 2009	DESCRIPTION: F/H CABINET WITH 10 VRLA BATTERIES, 1 CHARGER	SHEET: 1 OF 1